


# Tie-Lok® Ties

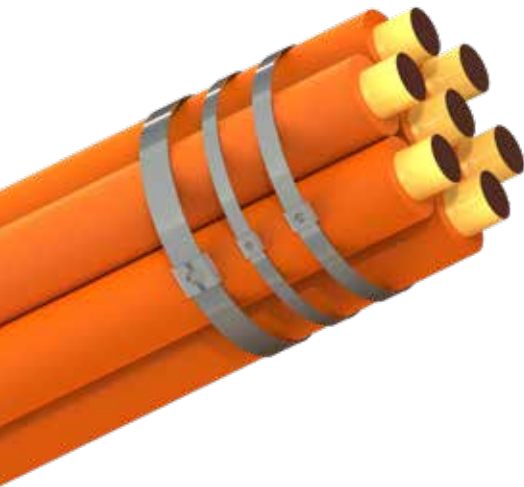

## BAND-IT® Tie-Lok® ties offer a unique dimple lock with a smooth ID and a low profile.

Provides fast, consistent and reliable clamping tension. Used in many industries such as automotive, cable bundling and identification.

- Strong patented dimple lock
- Locks under full tension - no slipback  
Three Widths: 0.177 (4.49mm), 0.25" (6.35mm) and 0.325" (9.6mm)
- Available in type 304 and type 316 Stainless Steel to provide good resistance to mild atmosphere, fresh water, UV rays and extreme environments
- 316 Stainless Steel for extreme environments
- Forms a low profile single wrapped assembly to secure cables, hoses, I.D. Tags, CV Boots, filter bags

| Part No.            | Material | Width |     | Length |     | Thickness |      | Maximum Diameter Single Wrap |     | Minimum Loop Tensile Strength (Lbs) | Package Quantity | Application Tools |
|---------------------|----------|-------|-----|--------|-----|-----------|------|------------------------------|-----|-------------------------------------|------------------|-------------------|
|                     |          | In    | mm  | In     | mm  | In        | mm   | In                           | mm  |                                     |                  |                   |
| <b>Tie-Lok® Tie</b> |          |       |     |        |     |           |      |                              |     |                                     |                  |                   |
| AS2119              | 304 SS   | 0.25  | 6.4 | 10.0   | 254 | 0.015     | 0.38 | 2                            | 51  | 250                                 | 100/Bag          | A92079<br>IT1000  |
| AS2129              | 304 SS   | 0.25  | 6.4 | 16.5   | 419 | 0.015     | 0.38 | 4                            | 101 | 250                                 | 100/Bag          |                   |
| AS2139              | 304 SS   | 0.25  | 6.4 | 22.5   | 572 | 0.015     | 0.38 | 6                            | 152 | 250                                 | 100/Bag          |                   |
| AS2149              | 304 SS   | 0.25  | 6.4 | 29.0   | 737 | 0.015     | 0.38 | 8                            | 203 | 250                                 | 100/Bag          |                   |
| AS2159              | 304 SS   | 0.25  | 6.4 | 35.0   | 889 | 0.015     | 0.38 | 10                           | 254 | 250                                 | 100/Bag          |                   |
| AS4119              | 316 SS   | 0.25  | 6.4 | 10.0   | 254 | 0.015     | 0.38 | 2                            | 51  | 250                                 | 100/Bag          |                   |
| AS4129              | 316 SS   | 0.25  | 6.4 | 16.5   | 419 | 0.015     | 0.38 | 4                            | 101 | 250                                 | 100/Bag          |                   |
| AS4139              | 316 SS   | 0.25  | 6.4 | 22.5   | 572 | 0.015     | 0.38 | 6                            | 152 | 250                                 | 100/Bag          |                   |
| AS4149              | 316 SS   | 0.25  | 6.4 | 29.0   | 737 | 0.015     | 0.38 | 8                            | 203 | 250                                 | 100/Bag          |                   |
| AS4159              | 316 SS   | 0.25  | 6.4 | 35.0   | 889 | 0.015     | 0.38 | 10                           | 254 | 250                                 | 100/Bag          |                   |
| AS6219              | 304 SS   | 0.375 | 9.6 | 7.2    | 184 | 0.020     | 0.51 | 1.5                          | 40  | 350                                 | 100/Bag          | IT6000<br>TL3800  |
| AS6229              | 304 SS   | 0.375 | 9.6 | 10.0   | 254 | 0.020     | 0.51 | 2                            | 51  | 350                                 | 100/Bag          |                   |
| AS6239              | 304 SS   | 0.375 | 9.6 | 16.0   | 406 | 0.020     | 0.51 | 4                            | 101 | 350                                 | 100/Bag          |                   |
| AS6249              | 304 SS   | 0.375 | 9.6 | 22.5   | 572 | 0.020     | 0.51 | 6                            | 152 | 350                                 | 100/Bag          |                   |
| AS6259              | 304 SS   | 0.375 | 9.6 | 29.0   | 737 | 0.020     | 0.51 | 8                            | 203 | 350                                 | 100/Bag          |                   |

\* TL3800 to be used with 3/8" only.



| Part No.                 | Material | Width |     | Length |     | Thickness |      | Maximum Diameter Single Wrap |     | Minimum Loop Tensile Strength (Lbs) | Package Quantity | Application Tools |
|--------------------------|----------|-------|-----|--------|-----|-----------|------|------------------------------|-----|-------------------------------------|------------------|-------------------|
|                          |          | In    | mm  | In     | mm  | In        | mm   | In                           | mm  |                                     |                  |                   |
| <b>Mini Tie-Lok® Tie</b> |          |       |     |        |     |           |      |                              |     |                                     |                  |                   |
| AS2219                   | 304 SS   | 0.177 | 4.5 | 7      | 165 | 0.015     | 0.38 | 1                            | 25  | 100                                 | 100/Bag          | A91079<br>IT0750  |
| AS2229                   | 304 SS   | 0.177 | 4.5 | 10     | 254 | 0.015     | 0.38 | 2                            | 51  | 100                                 | 100/Bag          |                   |
| AS2239                   | 304 SS   | 0.177 | 4.5 | 16     | 406 | 0.015     | 0.38 | 4                            | 102 | 100                                 | 100/Bag          |                   |
| AS2249                   | 304 SS   | 0.177 | 4.5 | 22.5   | 572 | 0.015     | 0.38 | 6                            | 152 | 100                                 | 100/Bag          |                   |
| AS2259                   | 304 SS   | 0.177 | 4.5 | 29     | 737 | 0.015     | 0.38 | 8                            | 203 | 100                                 | 100/Bag          |                   |
| AS4219                   | 316 SS   | 0.177 | 4.5 | 7      | 165 | 0.015     | 0.38 | 1                            | 25  | 100                                 | 100/Bag          |                   |
| AS4229                   | 316 SS   | 0.177 | 4.5 | 10     | 254 | 0.015     | 0.38 | 2                            | 51  | 100                                 | 100/Bag          |                   |
| AS4239                   | 316 SS   | 0.177 | 4.5 | 16     | 406 | 0.015     | 0.38 | 4                            | 102 | 100                                 | 100/Bag          |                   |
| AS4249                   | 316 SS   | 0.177 | 4.5 | 22.5   | 572 | 0.015     | 0.38 | 6                            | 152 | 100                                 | 100/Bag          |                   |
| AS4259                   | 316 SS   | 0.177 | 4.5 | 29     | 737 | 0.015     | 0.38 | 8                            | 203 | 100                                 | 100/Bag          |                   |

## Multi-Lok Ties



**BAND-IT® Multi-Lok ties offer a high strength plus vibration resistant benefit. This product is a perfect choice for harsh duty or marine environments.**

- Self-locking ties
- Two widths - 0.276" (7.01mm) and 0.472" (12.0mm)
- Coated with Nylon 11 or uncoated 316 SS styles available
- Fast, easy application
- Install by hand or with a variety of tools
- Unique high strength multiple locking system

| Part No          | Material | Width           |       | Length |      | Thickness (Coated/Un-coated Coated) |               | Maximum Diameter Single Wrap |     | Minimum Loop Tensile Strength (Lbs) | Package Quantity | Application Tools |                  |
|------------------|----------|-----------------|-------|--------|------|-------------------------------------|---------------|------------------------------|-----|-------------------------------------|------------------|-------------------|------------------|
|                  |          | In              | mm    | In     | mm   | In                                  | mm            | In                           | mm  |                                     |                  |                   |                  |
| <b>Multi-Lok</b> |          |                 |       |        |      |                                     |               |                              |     |                                     |                  |                   |                  |
| <b>Coated</b>    |          | <b>Uncoated</b> |       |        |      |                                     |               |                              |     |                                     |                  |                   |                  |
| AE6119           | AE6019   | 316 SS          | 0.276 | 7.01   | 6.0  | 150                                 | 0.018 / 0.011 | 0.46 / 0.28                  | 1.3 | 33                                  | 250              | 100/Bag           | M50389<br>XE9229 |
| AE6129           | AE6029   | 316 SS          | 0.276 | 7.01   | 9.0  | 225                                 | 0.018 / 0.011 | 0.46 / 0.28                  | 2.2 | 57                                  | 250              | 100/Bag           |                  |
| AE6139           | AE6039   | 316 SS          | 0.276 | 7.01   | 12.0 | 300                                 | 0.018 / 0.011 | 0.46 / 0.28                  | 3.2 | 81                                  | 250              | 100/Bag           |                  |
| AE6149           | AE6049   | 316 SS          | 0.276 | 7.01   | 18.0 | 450                                 | 0.018 / 0.011 | 0.46 / 0.28                  | 5.1 | 129                                 | 250              | 100/Bag           |                  |
| AE6159           | AE6059   | 316 SS          | 0.276 | 7.01   | 24.0 | 610                                 | 0.018 / 0.011 | 0.46 / 0.28                  | 7.1 | 180                                 | 250              | 100/Bag           |                  |
| AE7119*          | AE7019*  | 316 SS          | 0.472 | 12.0   | 6.0  | 150                                 | 0.018 / 0.011 | 0.46 / 0.28                  | 1.3 | 33                                  | 415              | 100/Bag           |                  |
| AE7129*          | AE7029   | 316 SS          | 0.472 | 12.0   | 9.0  | 225                                 | 0.018 / 0.011 | 0.46 / 0.28                  | 2.2 | 57                                  | 415              | 100/Bag           |                  |
| AE7139*          | AE7039   | 316 SS          | 0.472 | 12.0   | 12.0 | 300                                 | 0.018 / 0.011 | 0.46 / 0.28                  | 3.2 | 81                                  | 415              | 100/Bag           |                  |
| AE7149*          | AE7049   | 316 SS          | 0.472 | 12.0   | 18.0 | 450                                 | 0.018 / 0.011 | 0.46 / 0.28                  | 5.1 | 129                                 | 415              | 100/Bag           |                  |
| AE7159*          | AE7059   | 316 SS          | 0.472 | 12.0   | 24.0 | 610                                 | 0.018 / 0.011 | 0.46 / 0.28                  | 7.1 | 180                                 | 415              | 100/Bag           |                  |

\* Subject to extended lead time and minimum order quantities. Call for quotes.




## Ultra-Lok® Ties

- Strongest Tie
- Smooth ID ties with low profile
- Stainless Steel tie with ULTRA-LOK® locking style
- Provides fast, reliable, consistent clamp
- Great for cable bundling

| Part No.               | Material | Width |     | Length |     | Thickness |      | Maximum Diameter Single Wrap |     | Minimum Loop Tensile Strength (Lbs) | Package Quantity | Application Tools |
|------------------------|----------|-------|-----|--------|-----|-----------|------|------------------------------|-----|-------------------------------------|------------------|-------------------|
|                        |          | In    | mm  | In     | mm  | In        | mm   | In                           | mm  |                                     |                  |                   |
| <b>ULTRA-LOK® Ties</b> |          |       |     |        |     |           |      |                              |     |                                     |                  |                   |
| AU2029                 | 201 SS   | 0.25  | 6.4 | 8      | 203 | 0.015     | 0.38 | 1.5                          | 38  | 400                                 | 100/Bag          | A94079            |
| AU2039                 | 201 SS   | 0.25  | 6.4 | 10     | 254 | 0.015     | 0.38 | 2.5                          | 63  | 400                                 | 100/Bag          |                   |
| AU2089                 | 201 SS   | 0.25  | 6.4 | 24     | 610 | 0.015     | 0.38 | 7                            | 177 | 400                                 | 100/Bag          |                   |

# BALL-LOK TIES

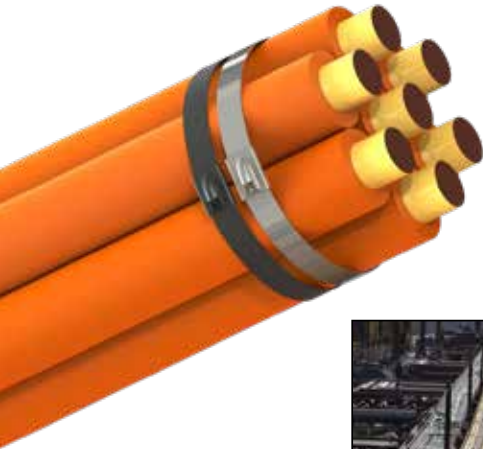

**Ball-Lok Ties are quick and easy to apply offering a versatile solution for heavy duty applications.**

Ball-Lok Ties come with a heavy duty buckle that offers superior corrosive, abrasive and UV resistance performance that makes this product perfect for harsh duty or marine environments.


- Two widths - 0.18" (4.6mm) and 0.31" (7.9mm)
- Self locking design allows fast installation
- Install with tools to ensure uniform tension and clean tail cut-off for safe handling
- Available in Type 304 and Type 316 stainless steels to provide good to excellent corrosion resistance in a wide variety of environments
- Fully coated with black, halogen free epoxy
- This product line is also available with halogen free, low smoke black selectively coated Nylon 11 coating which reduces the risk of cutting or abrading cable insulation or hose coverings

| Part Number   | Width                           |  | Length |      | Base Material Thickness |       | Maximum Bundle Diameter |      | Minimum Loop Tensile Strength (Lbs) | Package Quantity | Application Tools |
|---|---------------------------------|--|--------|------|-------------------------|-------|-------------------------|------|-------------------------------------|------------------|-------------------|
|   | In                              | mm   | In     | mm   | In                      | mm    | In                      | mm   |                                     |                  |                   |
| <b>Ball-Lok Ties</b>  |                                 |  |        |      |                         |       |                         |      |                                     |                  |                   |
| <b>304 SS Uncoated Material</b>   | <b>316 SS Uncoated Material</b> | <b>*90 day lead time, expedited shipping available (US only)</b> |        |      |                         |       |                         |      |                                     |                  |                   |
| KE1118*   | KE0118                          | 0.18   | 4.6    | 5.9  | 150                     | 0.010 | 0.25                    | 1.2  | 30                                  | 200              | 100/Bag           |
| KE1128  | KE0128                          | 0.18   | 4.6    | 7.9  | 201                     | 0.010 | 0.25                    | 2.0  | 50                                  | 200              | 100/Bag           |
| KE1138  | KE0138                          | 0.18   | 4.6    | 10.2 | 259                     | 0.010 | 0.25                    | 2.7  | 69                                  | 200              | 100/Bag           |
| KE1148  | KE0148                          | 0.18   | 4.6    | 14.2 | 360                     | 0.010 | 0.25                    | 4.0  | 102                                 | 200              | 100/Bag           |
| KE1158*   | KE0158                          | 0.18   | 4.6    | 20.4 | 520                     | 0.010 | 0.25                    | 6.0  | 152                                 | 200              | 100/Bag           |
| KE1168*   | KE0168                          | 0.18   | 4.6    | 26.8 | 679                     | 0.010 | 0.25                    | 8.0  | 203                                 | 200              | 100/Bag           |
| KE1178*   | KE0178*                         | 0.18   | 4.6    | 33.0 | 838                     | 0.010 | 0.25                    | 10.0 | 254                                 | 200              | 100/Bag           |
| KE1188*   | KE0188                          | 0.18   | 4.6    | 42.0 | 1067                    | 0.010 | 0.25                    | 12.0 | 305                                 | 200              | 100/Bag           |
| KE1328  | KE0328                          | 0.31   | 7.9    | 7.9  | 201                     | 0.010 | 0.25                    | 2.0  | 50                                  | 300              | 100/Bag           |
| KE1338*   | KE0338                          | 0.31   | 7.9    | 10.2 | 259                     | 0.010 | 0.25                    | 2.7  | 69                                  | 300              | 100/Bag           |
| KE1348  | KE0348                          | 0.31   | 7.9    | 14.2 | 360                     | 0.010 | 0.25                    | 4.0  | 102                                 | 300              | 100/Bag           |
| KE1358  | KE0358                          | 0.31   | 7.9    | 20.4 | 520                     | 0.010 | 0.25                    | 6.0  | 152                                 | 300              | 100/Bag           |
| KE1368  | KE0368*                         | 0.31   | 7.9    | 26.8 | 679                     | 0.010 | 0.25                    | 8.0  | 203                                 | 300              | 100/Bag           |
| KE1378*   | KE0378*                         | 0.31   | 7.9    | 33.0 | 838                     | 0.010 | 0.25                    | 10.0 | 254                                 | 300              | 100/Bag           |
| KE1388*   | KE0388                          | 0.31   | 7.9    | 42.0 | 1067                    | 0.010 | 0.25                    | 12.0 | 305                                 | 300              | 100/Bag           |
| <b>* Subject to extended lead time and minimum order quantities. Call for quotes.</b> |                                 |  |        |      |                         |       |                         |      |                                     |                  |                   |
| <b>316 SS Coated Material (Epoxy)</b>   |                                 |  |        |      |                         |       |                         |      |                                     |                  |                   |
| KE0228*   |                                 | 0.18   | 4.6    | 7.9  | 201                     | 0.010 | 0.25                    | 2.0  | 50                                  | 150              | 100/Bag           |
| KE0238*   |                                 | 0.18   | 4.6    | 10.2 | 259                     | 0.010 | 0.25                    | 2.7  | 69                                  | 150              | 100/Bag           |
| KE0248*   |                                 | 0.18   | 4.6    | 14.2 | 360                     | 0.010 | 0.25                    | 4.0  | 102                                 | 150              | 100/Bag           |
| KE0258*   |                                 | 0.18   | 4.6    | 20.4 | 520                     | 0.010 | 0.25                    | 6.0  | 152                                 | 150              | 100/Bag           |
| KE0268*   |                                 | 0.18   | 4.6    | 26.8 | 679                     | 0.010 | 0.25                    | 8.0  | 203                                 | 150              | 100/Bag           |
| KE0278*   |                                 | 0.18   | 4.6    | 33.0 | 838                     | 0.010 | 0.25                    | 10.0 | 254                                 | 150              | 100/Bag           |
| KE0428*   |                                 | 0.31   | 7.9    | 7.9  | 201                     | 0.010 | 0.25                    | 2.0  | 50                                  | 175              | 100/Bag           |
| KE0438*   |                                 | 0.31   | 7.9    | 10.2 | 259                     | 0.010 | 0.25                    | 2.7  | 69                                  | 175              | 100/Bag           |
| KE0448*   |                                 | 0.31   | 7.9    | 14.2 | 360                     | 0.010 | 0.25                    | 4.0  | 102                                 | 175              | 100/Bag           |
| KE0458*   |                                 | 0.31   | 7.9    | 20.4 | 520                     | 0.010 | 0.25                    | 6.0  | 152                                 | 175              | 100/Bag           |
| KE0468*   |                                 | 0.31   | 7.9    | 26.8 | 679                     | 0.010 | 0.25                    | 8.0  | 203                                 | 175              | 100/Bag           |
| KE0478*   |                                 | 0.31   | 7.9    | 33.0 | 838                     | 0.010 | 0.25                    | 10.0 | 254                                 | 175              | 100/Bag           |
| <b>* Subject to extended lead time and minimum order quantities. Call for quotes.</b> |                                 |  |        |      |                         |       |                         |      |                                     |                  |                   |



K50289  
XE9229  
or by hand

# BALL-LOKT™ TIES



**Ball-Lokt™ Ties unique buckle design is the globally accepted industry standard.**

- Four widths – 0.18" (4.6mm), 0.31" (7.9mm), 0.47" (12mm), and 0.59" (15mm) for applications ranging from identification tagging to bundling large cables
- Self locking design allows fast installation
- Installation with hand tool to assure uniform tension and clean tail cut-off for safe handling
- Available in Type 304 and Type 316 stainless steels to provide good to excellent corrosion resistance in a wide variety of environments
- Coated Ball-Lokt™ Ties are fully coated with black epoxy

| Part Number           | Material        | Width  |      | Length |      | Base Material Thickness |       | Maximum Diameter Single Wrap |      | Minimum Loop Tensile Strength lbs | Package Quantity | Application Tools |
|-----------------------|-----------------|--------|------|--------|------|-------------------------|-------|------------------------------|------|-----------------------------------|------------------|-------------------|
|                       |                 | In     | mm   | In     | mm   | In                      | mm    | In                           | mm   |                                   |                  |                   |
| <b>Ball-Lok™ Ties</b> |                 |        |      |        |      |                         |       |                              |      |                                   |                  |                   |
| <b>Coated</b>         | <b>Uncoated</b> |        |      |        |      |                         |       |                              |      |                                   |                  |                   |
|                       | KT4U046-0200*   | 304 SS | 0.18 | 4.6    | 7.9  | 200                     | 0.010 | 0.25                         | 2.0  | 52                                | 100              | 100               |
|                       | KT4U046-0250*   | 304 SS | 0.18 | 4.6    | 9.8  | 250                     | 0.010 | 0.25                         | 2.7  | 67                                | 100              | 100               |
|                       | KT4U046-0350*   | 304 SS | 0.18 | 4.6    | 13.8 | 350                     | 0.010 | 0.25                         | 3.9  | 99                                | 100              | 100               |
|                       | KT4U046-0500*   | 304 SS | 0.18 | 4.6    | 19.7 | 500                     | 0.010 | 0.25                         | 5.8  | 147                               | 100              | 100               |
| KT6B046-0200*         | KT6U046-0200*   | 316 SS | 0.18 | 4.6    | 7.9  | 200                     | 0.010 | 0.25                         | 2.0  | 52                                | 100              | 100               |
| KT6B046-0250*         | KT6U046-0250    | 316 SS | 0.18 | 4.6    | 9.8  | 250                     | 0.010 | 0.25                         | 2.7  | 37                                | 100              | 100               |
| KT6B046-0350          | KT6U046-0350    | 316 SS | 0.18 | 4.6    | 13.8 | 350                     | 0.010 | 0.25                         | 3.9  | 99                                | 100              | 100               |
| KT6B046-0500*         | KT6U046-0500*   | 316 SS | 0.18 | 4.6    | 19.7 | 500                     | 0.010 | 0.25                         | 5.8  | 147                               | 100              | 100               |
|                       | KT4U078-0200*   | 304 SS | 0.31 | 7.9    | 7.9  | 200                     | 0.010 | 0.25                         | 2.0  | 52                                | 175              | 100               |
|                       | KT4U078-0250    | 304 SS | 0.31 | 7.9    | 9.8  | 250                     | 0.010 | 0.25                         | 2.7  | 67                                | 175              | 100               |
|                       | KT4U078-0350    | 304 SS | 0.31 | 7.9    | 13.8 | 350                     | 0.010 | 0.25                         | 3.9  | 99                                | 175              | 100               |
|                       | KT4U078-0500*   | 304 SS | 0.31 | 7.9    | 19.7 | 500                     | 0.010 | 0.25                         | 5.8  | 147                               | 175              | 100               |
|                       | KT4U078-0600*   | 304 SS | 0.31 | 7.9    | 23.6 | 600                     | 0.010 | 0.25                         | 7.0  | 179                               | 175              | 100               |
| KT6B078-0200*         | KT6U078-0200*   | 316 SS | 0.31 | 7.9    | 7.9  | 200                     | 0.010 | 0.25                         | 2.0  | 52                                | 175              | 100               |
| KT6B078-0250*         | KT6U078-0250*   | 316 SS | 0.31 | 7.9    | 9.8  | 250                     | 0.010 | 0.25                         | 2.7  | 67                                | 175              | 100               |
| KT6B078-0350          | KT6U078-0350*   | 316 SS | 0.31 | 7.9    | 13.8 | 350                     | 0.010 | 0.25                         | 3.9  | 99                                | 175              | 100               |
| KT6B078-0500*         | KT6U078-0500    | 316 SS | 0.31 | 7.9    | 19.7 | 500                     | 0.010 | 0.25                         | 5.8  | 147                               | 175              | 100               |
| KT6B078-0600*         | KT6U078-0600*   | 316 SS | 0.31 | 7.9    | 23.6 | 600                     | 0.010 | 0.25                         | 7.0  | 179                               | 175              | 100               |
| KT6B120-0450*         | KT6U120-0450*   | 316 SS | 0.47 | 12     | 17.7 | 450                     | 0.014 | 0.35                         | 5.2  | 131                               | 250              | 100               |
| KT6B120-0550*         | KT6U120-0550*   | 316 SS | 0.47 | 12     | 21.7 | 500                     | 0.014 | 0.35                         | 6.4  | 163                               | 250              | 100               |
| KT6B120-0600*         | KT6U120-0600*   | 316 SS | 0.47 | 12     | 23.6 | 600                     | 0.014 | 0.35                         | 7.0  | 179                               | 250              | 100               |
| KT6B150-0500          | KT6U150-0500*   | 316 SS | 0.59 | 15     | 19.7 | 500                     | 0.014 | 0.35                         | 5.8  | 147                               | 325              | 50                |
| KT6B150-0600*         | KT6U150-0600    | 316 SS | 0.59 | 15     | 23.6 | 600                     | 0.014 | 0.35                         | 7.0  | 179                               | 325              | 50                |
| KT6B150-0700*         | KT6U150-0700*   | 316 SS | 0.59 | 15     | 27.6 | 700                     | 0.014 | 0.35                         | 8.3  | 211                               | 325              | 50                |
| KT6B150-0750          | KT6U150-0750    | 316 SS | 0.59 | 15     | 29.5 | 750                     | 0.014 | 0.35                         | 9.6  | 243                               | 325              | 50                |
| KT6B150-0900*         | KT6U150-0900*   | 316 SS | 0.59 | 15     | 35.4 | 900                     | 0.014 | 0.35                         | 10.8 | 274                               | 325              | 50                |
| KT6B150-1100*         | KT6U150-1100*   | 316 SS | 0.59 | 15     | 43.3 | 1100                    | 0.014 | 0.35                         | 13.3 | 338.2                             | 325              | 50                |

\* Subject to extended lead time and minimum order quantities. Call for quotes.



K50289  
XE9229  
or by hand

# BAND-IT® Reusable AE Ties



- Constructed of 316 Stainless Steel with PPA 571 coating
- PPA 571 is resistant to stress cracking, adverse weather conditions, detergents, salt spray and typical airborne pollutants
- One-piece construction with unique buckle designs capable of double wrapping for special strength requirements and reliable installation



DNV-GL

| Coated Part No         | Material*** | Width |     | Length |     | Thickness Coated |     | Maximum Diameter Single Wrap |     | Minimum Loop Tensile Strength (Lbs) | Package Quantity | Application Tools              |
|------------------------|-------------|-------|-----|--------|-----|------------------|-----|------------------------------|-----|-------------------------------------|------------------|--------------------------------|
|                        |             | In    | mm  | In     | mm  | In               | mm  | In                           | mm  |                                     |                  |                                |
| <b>BAND-IT AE Ties</b> |             |       |     |        |     |                  |     |                              |     |                                     |                  |                                |
| AE1118                 | 316 SS      | 1/4   | 6.4 | 6      | 152 | 0.045            | 1.1 | 1.5                          | 38  | 75/300**                            | 100/Bag          | AE2009<br>C07569<br>or by hand |
| AE1128                 | 316 SS      | 1/4   | 6.4 | 9      | 229 | 0.045            | 1.1 | 2.5                          | 63  | 75/300**                            | 100/Bag          |                                |
| AE1138                 | 316 SS      | 1/4   | 6.4 | 12     | 305 | 0.045            | 1.1 | 3.4                          | 86  | 75/300**                            | 100/Bag          |                                |
| AE1148                 | 316 SS      | 1/4   | 6.4 | 18     | 457 | 0.045            | 1.1 | 5.4                          | 137 | 75/300**                            | 100/Bag          |                                |
| AE1158                 | 316 SS      | 1/4   | 6.4 | 24     | 610 | 0.045            | 1.1 | 7.3                          | 185 | 75/300**                            | 100/Bag          |                                |
| AE3138                 | 316 SS      | 3/8   | 9.6 | 12     | 305 | 0.045            | 1.1 | 3.4                          | 86  | 100/500**                           | 100/Bag          |                                |
| AE3148                 | 316 SS      | 3/8   | 9.6 | 18     | 457 | 0.045            | 1.1 | 5.4                          | 137 | 100/500**                           | 100/Bag          |                                |
| AE3158*                | 316 SS      | 3/8   | 9.6 | 24     | 610 | 0.045            | 1.1 | 7.3                          | 185 | 100/500**                           | 100/Bag          |                                |
| AE3178*                | 316 SS      | 3/8   | 9.6 | 36     | 914 | 0.045            | 1.1 | 11                           | 280 | 100/500**                           | 100/Bag          |                                |

\* Subject to extended lead time and minimum order quantities. Call for quotes.  
 \*\* Single / Double Wrapped  
 \*\*\* Material thickness includes coating

AE Ties



# Stainless Steel Cable Ties



|  | TIE-LOK           |                   | BALL-LOK UCTD    |                  | BALL-LOK CTD     |                  | MULTI-LOK UCTD   |               | MULTI-LOK CTD    |               | BAND-IT TIE CTD   |                    | BAND-FAST CLAMP  |                    |
|--|-------------------|-------------------|------------------|------------------|------------------|------------------|------------------|---------------|------------------|---------------|-------------------|--------------------|------------------|--------------------|
|  | .177<br>.25<br>In | 4.5<br>6.35<br>mm | .18<br>.03<br>In | 4.6<br>7.9<br>mm | .18<br>.03<br>In | 4.6<br>7.9<br>mm | .27<br>.47<br>In | 7<br>12<br>mm | .27<br>.47<br>In | 7<br>12<br>mm | .25<br>.375<br>In | 6.35<br>9.53<br>mm | .375<br>.5<br>In | 9.53<br>12.7<br>mm |
| <b>AVAILABLE WIDTHS</b>                    |                   |                   |                  |                  |                  |                  |                  |               |                  |               |                   |                    |                  |                    |
| <b>Quick Reference of Product Features</b> |                   |                   |                  |                  |                  |                  |                  |               |                  |               |                   |                    |                  |                    |
| 304 S/S (for general corrosion resistance) | ●                 | ●                 | ●                | ●                |                  |                  |                  |               |                  |               |                   |                    |                  |                    |
| 316 S/S (for general corrosion resistance) | ●                 | ●                 | ●                | ●                | ●                | ●                | ●                | ●             | ●                | ●             | ●                 | ●                  | ●                | ●                  |
| Uncoated                                   | ●                 | ●                 | ●                | ●                |                  |                  | ●                | ●             |                  |               |                   |                    | ●                | ●                  |
| Epoxy Coated                               |                   |                   |                  |                  | ●                | ●                |                  |               |                  |               |                   |                    |                  |                    |
| Nylon 11 Coated                            |                   |                   |                  |                  |                  |                  |                  |               | ●                | ●             |                   |                    |                  |                    |
| PPA 571                                    |                   |                   |                  |                  |                  |                  |                  |               |                  |               | ●                 | ●                  | ●                | ●                  |
| Black Color                                |                   |                   |                  |                  | ●                | ●                |                  |               | ●                | ●             | ●                 | ●                  | ●                | ●                  |
| Self Locking                               |                   |                   | ●                | ●                | ●                | ●                | ●                | ●             | ●                | ●             |                   |                    |                  |                    |
| Releasable / Reusable                      |                   |                   |                  |                  |                  |                  |                  |               |                  |               | ●                 | ●                  |                  |                    |